

PolyBlend® M Series Polymer Feed System

Product Sheet



The PolyBlend® M Series liquid polymer feed system is the best product available to handle your liquid/solid separation needs. The M Series combines proven motorized mixing technology with precise controls to provide superior polymer preparation. In addition, the M Series can be configured with a variety of pump offerings, variable speed mixing and automatic dosage control with constant solution strength to meet a wide range of polymer feed application requirements. The M Series units are also available for classified area environments including Class 1, Division 1 and Class 1, Division 2 areas.

The M Series is engineered for quick easy service and is built to last. The open frame design permits quick and easy maintenance and the M Series is engineered to handle the harshest environments.

The M Series is designed to handle new polymer developments, ultra-high molecular weights, different charge densities, and even totally new chemistries. A constant speed motor is standard on the M Series and optional variable speed drives are available to accommodate application or technology. Optional advanced controls provide precise and consistent solution strength. Whether you adjust the M Series output remotely via 4-20 mA signal or right at the unit, water flow and polymer feed increase or decrease together. Primary and secondary dilution water are also kept at the same ratio as the output is adjusted.

A variety of models are available covering output ranges from 0.1 to 200 USGPM (0.4 to 757.9 LPM) Choose between diaphragm, gear, or progressive cavity polymer pumps for your application.

Specifications

Power	115-230VAC / 60 Hz / 1 Phase 230-460VAC / 60 Hz / 3 Phase
Dimensions	36"W (914.4mm) x 41" H (1041.4mm) x 20" D (508mm)
Polymer Pump	Diaphragm, Gear, or Progressive Cavity
Material	304 SS Frame / PVC
Controls	PolyBlend® A, B, or C



Benefits of the PolyBlend® M Series:

- Improved Polymer Efficiency Providing Maximum Polymer Activation
- Open-Frame Design for Easy Access
- Reliable and Consistent Direct Drive Mixing
- Optional Advanced Controls to Meet Your Application Need

M Series Model Numbering Guide

The model numbers for the M-Series can be generated as follows:

EXAMPLE: M 2400 - P - 10 A B - V

Water Flow Rate in GPH (LPH)

- 240/(912)
- 600/(2280)*
- 1200/(4540)
- 2400/(9120)
- 6000/(380 LPM)
- 12000/(760 LPM)

Pump Type and Output in GPH (LPH)

Diaphragm	Gear	Progressive Cavity
D.4/(1.5)	G18/(68)	P5/(19)
D1/(3.8)	G36/(137)	P10/(38)
D2.5/(9.5)	G60/(228)	P30/(114)
D4/(15.2)	G200/(760)	P50/(190)
D10/(38)	G660/(2508)	

Options

V – Variable speed mixer

Controls

A – On-Off-Remote

B – Microcontroller

C – Flow Proportional

Voltage


A – 115VAC/60Hz/1ph

B – 460VAC/60Hz/3ph

C – 230VAC/60Hz/1ph

*Model Number is "601"

General Layout

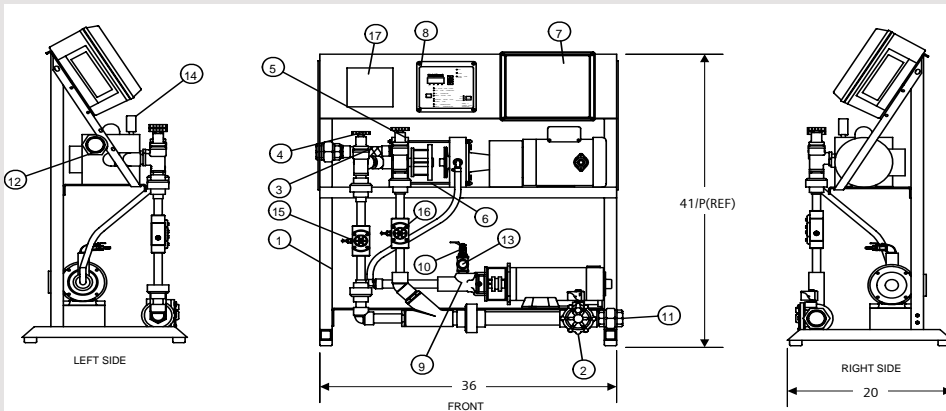

Key Description

1	Base Assembly
2	Solenoid Valve
3	Static Mixer
4	Primary Dilution Control Valve
5	Secondary Dilution Control Valve
6	Mix Chamber
7	Motor Control Panel
8	Micro-Controller
9	Pump, Progressive Cavity
10	Pump, Priming Port
11	Water Inlet
12	Solution Discharge
13	Polymer Inlet
14	Pressure Gauge (Mix Chamber)
15	Primary Dilution Water Sensor
16	Secondary Dilution Water Sensor
17	Operators Instructions

PolyBlend is a trademark of Siemens, its subsidiaries or affiliates.

The information provided in this brochure contains merely general descriptions or characteristics of performance which in actual case of use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of the contract.

Siemens
 Water Technologies
 595 Industrial Drive
 Bradley, IL 60915, USA
 800.809.0971 phone
 www.usfilter.com
 stranco.water@siemens.com

Literature No. ST-PBM-DS-0806
 Subject to change without notice.
 ©2006 Siemens Water Technologies Corp.